

BIG LEAD ASSEMBLY (BLA)

ABOUT



Shoals introduces the Big Lead Assembly, or BLA for short. The BLA is an aboveground aluminum trunk system that combines the functionality of cable assemblies, combiner boxes, and fusing all into one. This free air de-rated system eliminates the need for standard combiner boxes, messy multiple conductor string wires, cable trays, trenching, and field crimping. Factory manufactured and quality guaranteed.

FEATURES

- Up to (4) 8 AWG or (6) 10 AWG input leads per BLA mold drop
- Configurable for FSLR S4, FSLR S6, Crystalline, or Bi-Facial
- Eliminates standard combiner boxes
- Utilizes free air ampacity table NEC 310.17
- Plug and Play - eliminates field crimping and splicing
- Patented chemically bonded over-molding process
- Standard 5-year warranty on all models
- ETL certified to UL9703 for 600 VDC, 1000 VDC, and 1500 VDC systems

OPTIONS

- Customizable for up to 600 MCM wire gauges
- Messenger cable for mechanical attachment
- Cable available in standard colors
- BLM string monitoring

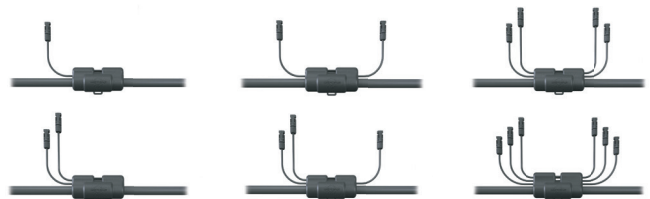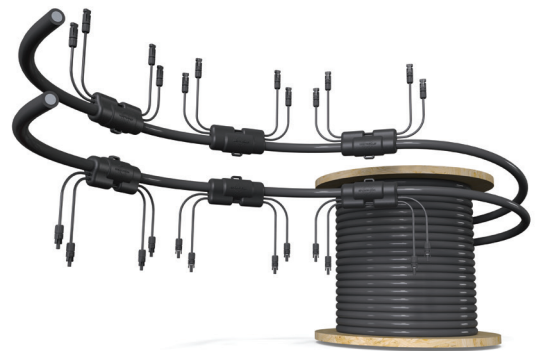

| TECHNICAL INFORMATION | STG.BLA |
|-------------------------------------|-------------------------------|
| Voltage Rating | 600 VDC / 1000 VDC / 1500 VDC |
| Max. Isc (Trunk) | Up to 670A* |
| Max. Isc (BLA Mold Drop/Per String) | 120A / 20.5A |
| Max. Trunk Cable Size | 600 MCM |
| Number of Input Circuits | Customer Specific |
| Max. Ambient Temp. Rating | 50°C |

*Max Isc shown is per NEC Code 2020, Table 310.17 for single-insulated conductors in free air at an ambient temperature of 30°C. Plastic over-mold material is suitable for outdoor use with respect to exposure to UV light, Water Exposure and Immersion in accordance with UL 746C. Product design and specification subject to change or modification without notice.

